OIPE JC42
MAR 19 2004
PATENT & TRADEMARK OFFICE

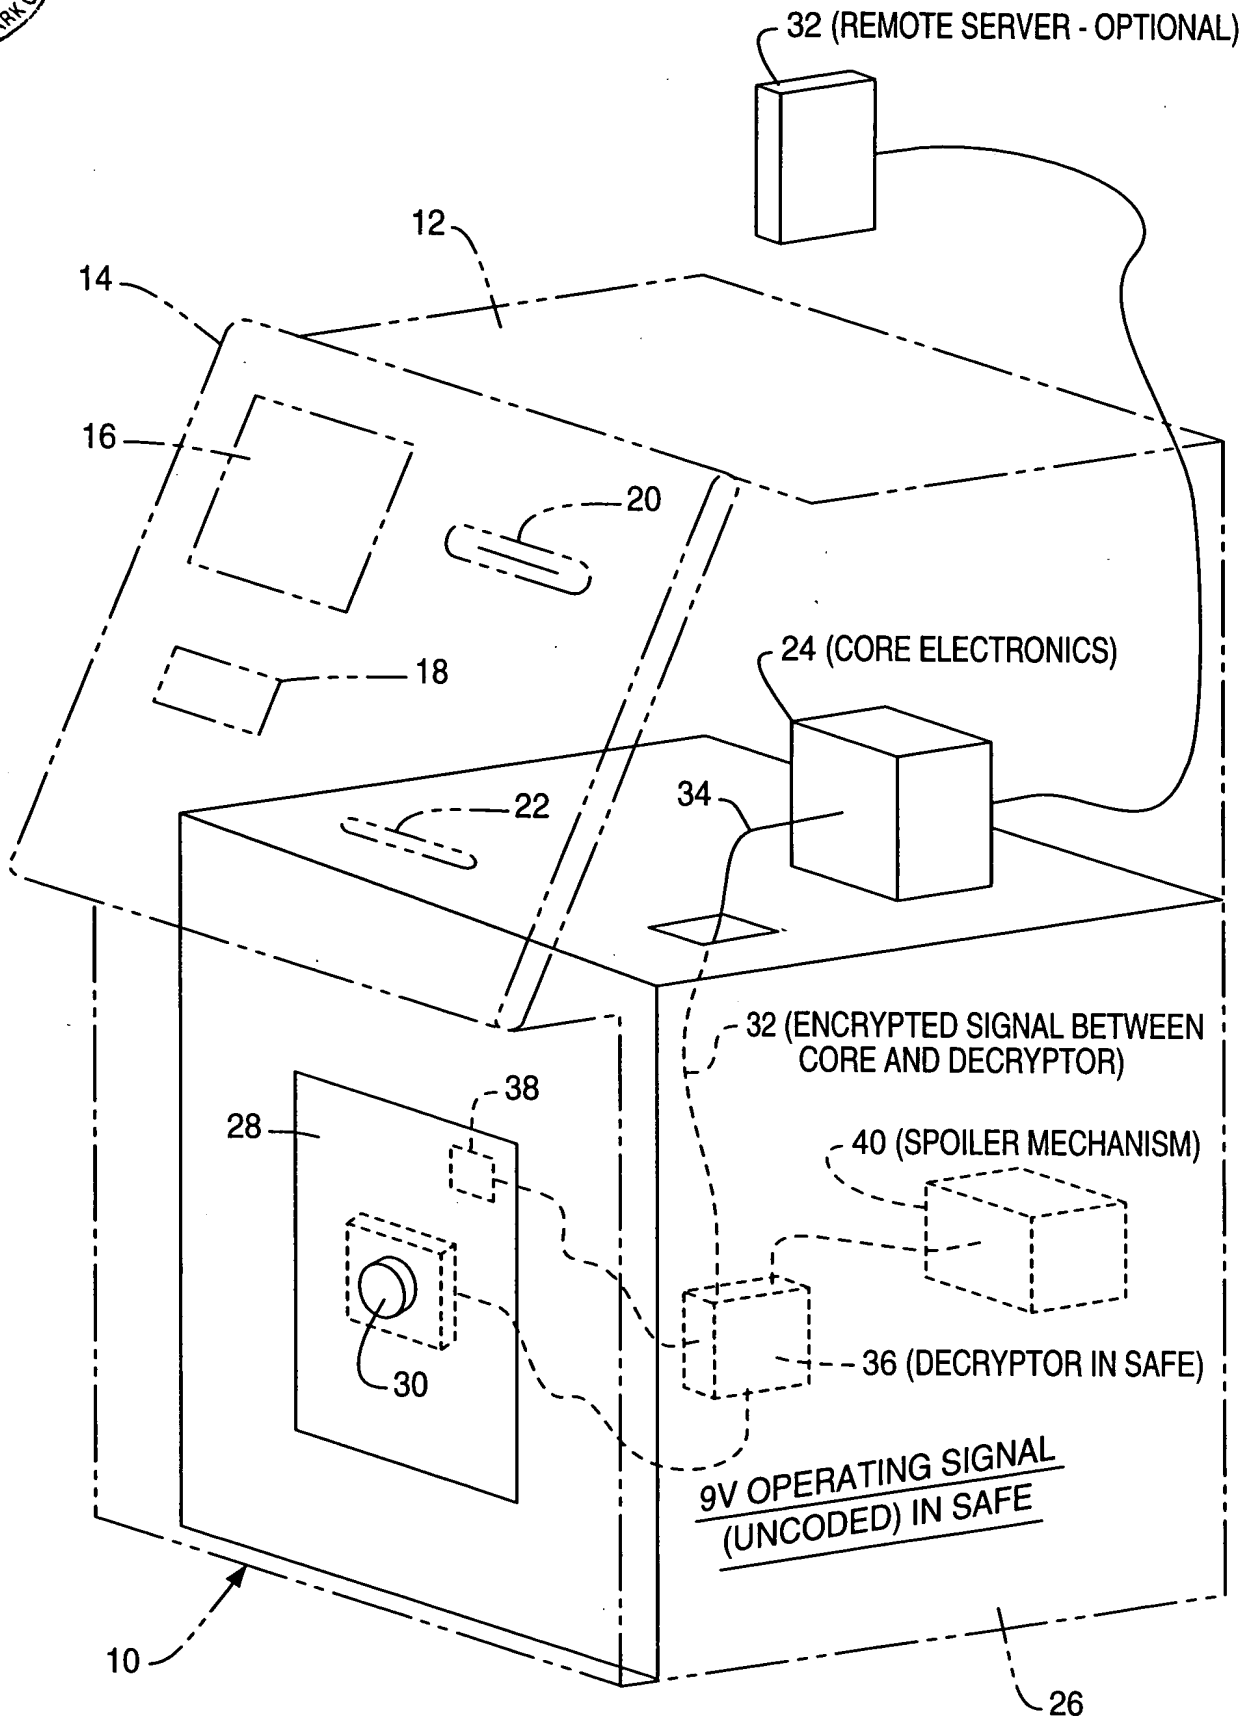

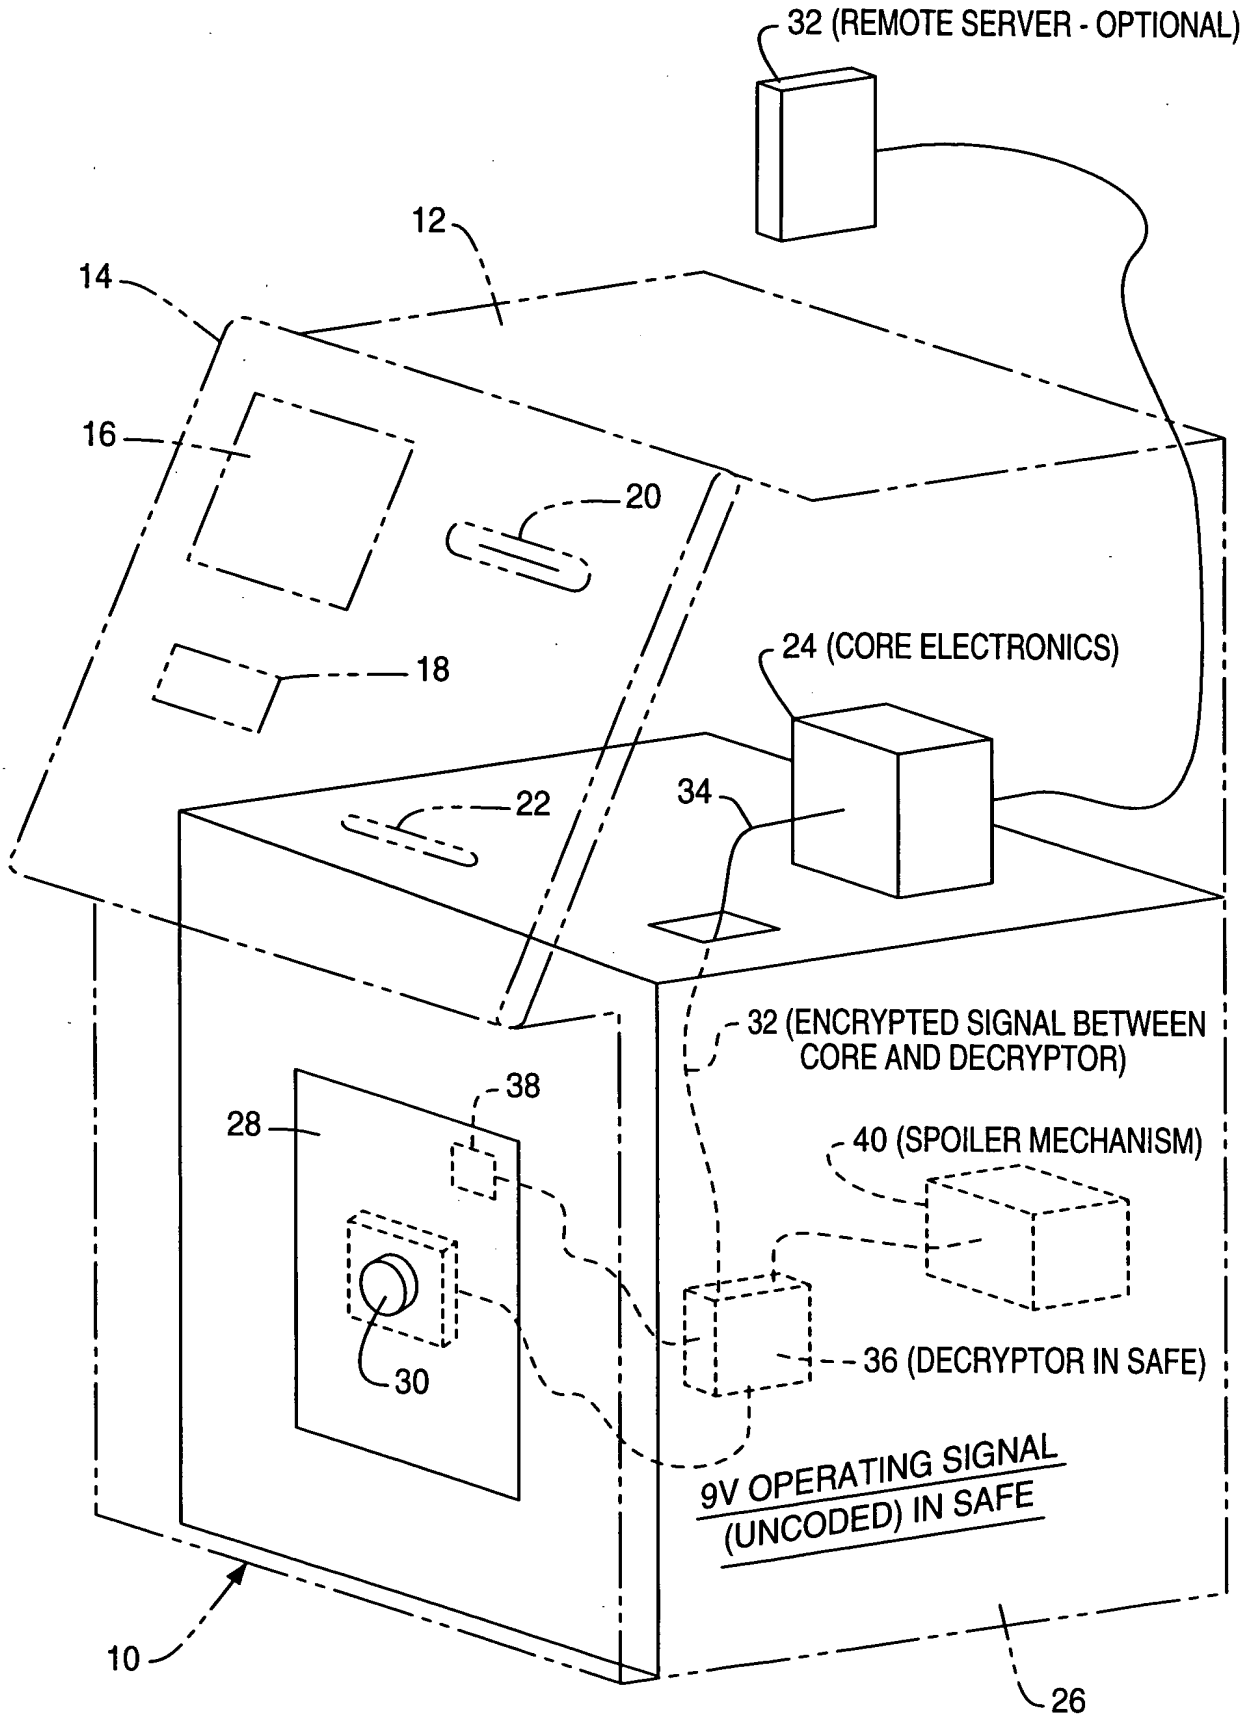
32 (REMOTE SERVER - OPTIONAL)
12
14
16
20
18
24 (CORE ELECTRONICS)
22
34
32 (ENCRYPTED SIGNAL BETWEEN CORE AND DECRYPTOR)
38
28
40 (SPOILER MECHANISM)
30
36 (DECRYPTOR IN SAFE)
9V OPERATING SIGNAL (UNCODED) IN SAFE
10
26